Contents

1. Product IntroductiF

http://ww

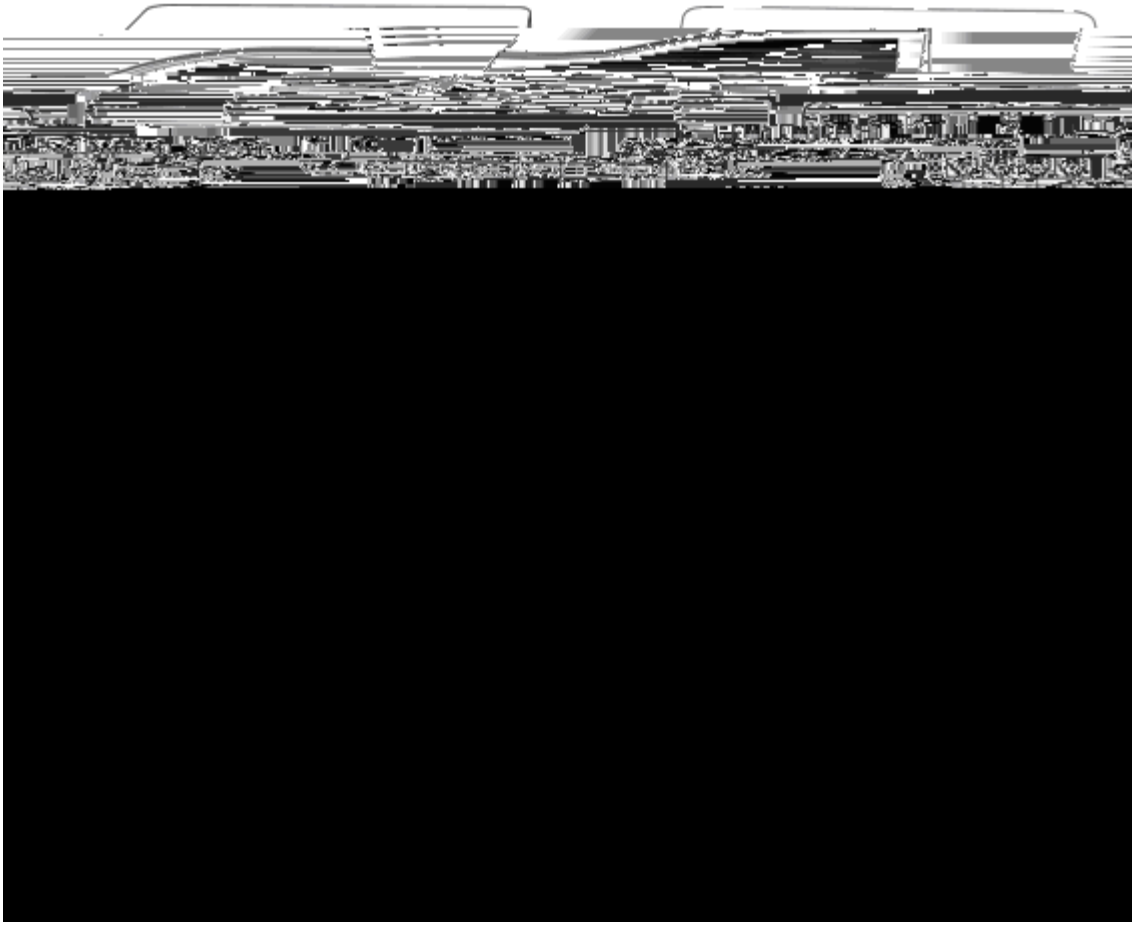

Diagram 2-1

Interface Name	Connect to	Notes
FXO 1-4	Connected to four telephone lines	

DC24V Connected to Tj-0.216 Tc 92 113.04 0.4.11136 Tc 05568 Tc (N) Tj-0.128(e) T24 Tc ( )f

10/100Base T

FXS 1-4 FXS outputNetwork interconnected to Network

h

http://www.hybe

If the connecti e8 Tc (i) ToTc (S) Tj-0.11136r-0.24 Tc (n) Tj0 Tc (n)

http://www.hyb

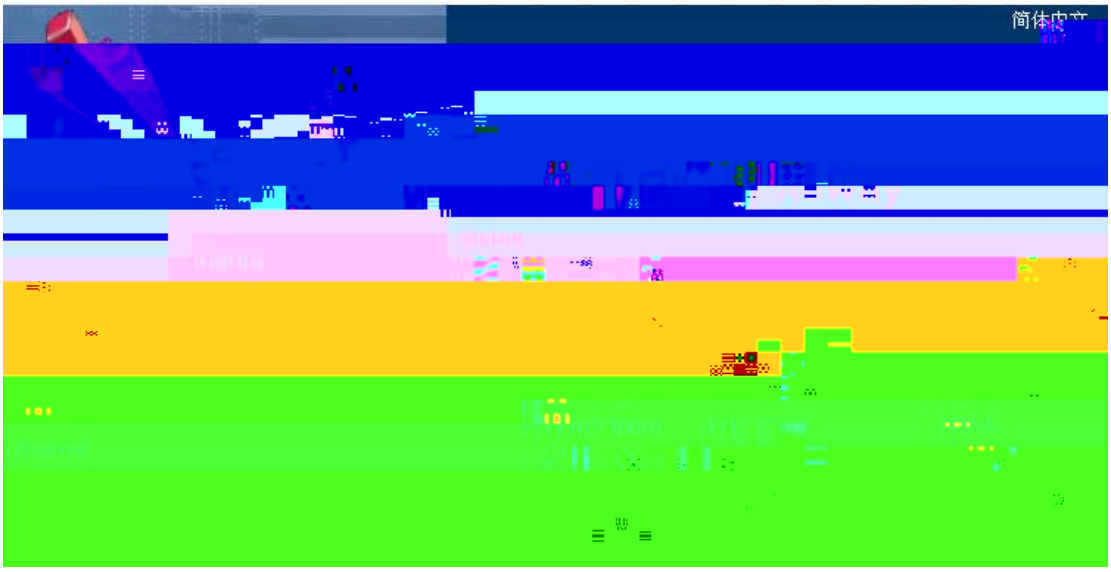

State of HTM-442

Se,uence number:0 Tc (442) Tj/F2e The Gateway factory serial number;

Softwan Tc (s) Tj-0.12Tj0.35136 0.08352 Tc (r) Tj-0.05568/cCTc (er:0 Tc (442) Tc (s) Tj-0.12864 Tc (e) Tj0.11136 T

j-0.05568 Tc (tt)is

http://ww

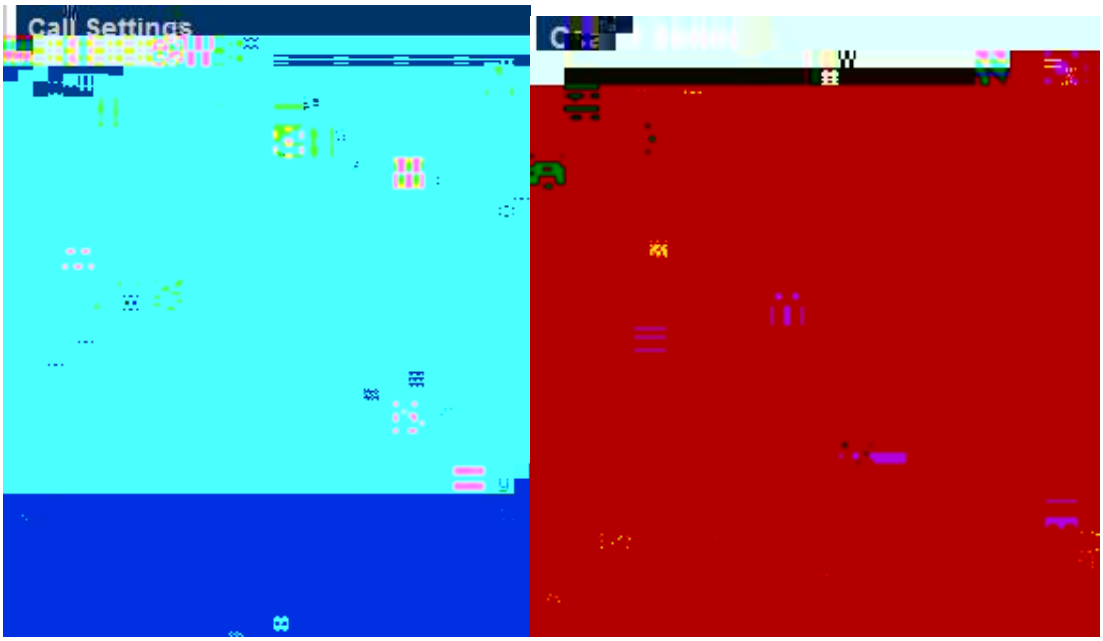
Call Settings

B) H.323 ID

A mode of account certification, users can fill according to the service provider.

C) Gatekeeper address

Use to find right Gatekeeper, fill the IP: 192.168.2.1 or domain: **gk yourisp.com**. If your port is not the standard (1719, 1720), you can add the special port in the back of the IP or domain, for68 Tc (i) Tj0.1113example:

http://wwwwhttwhwww

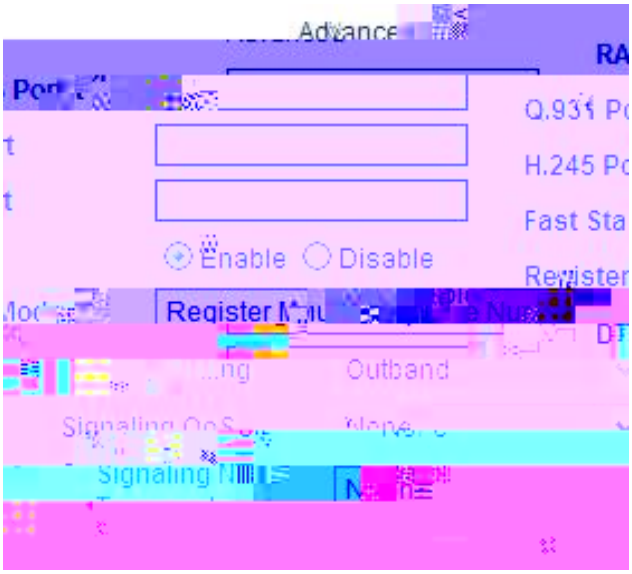

A) RAS Port

RAS is commay aPoys

http://ww

F) Certification ID

Use to fill the certification account that the Gateway logins on the SIP registration server.

G) Password

Use to fill the certification password when the Gateway logins on the SIP registration server.

H) Display Name

When you P rhe e

3.3.3.3.2. FXO Co

http://www.hybertone.com

3.3.3.4. riri

http://www.://

3.3.3.4.3. Media NAT Traversal

Similar to Signaling NAT Traversal, this feature allows media packets (RTP) to be routed properly in various network environments.

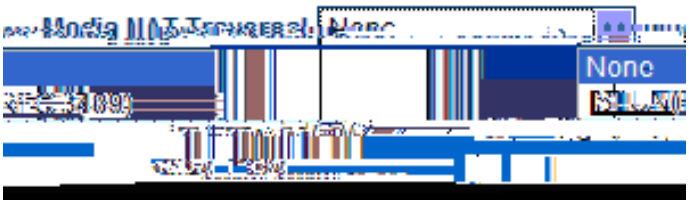

A NONE

Selecti**B**o**n**n**d**e**l**t**e**r**a**n**s**p**a**r**e**n**t**/DMZ**

Poat Transparent refers that put net

LAN. The actual servers allow external users enjoy the

HTTPhe It contains Gatewy address and the responding to

Gateway is communications equipme

3Tj0.055614 Tc ( ) Tj/F2 16.0wy+F

aj-0.05568 Tc (tt)ll prj-0.5511136 Tc (e) Tj-0.11136 Tc (q) Tj-0.35136 Tc (uj-0.5511136 Tc (e) Tj-0.68 Tc (tt)l:)



b) As indicated in figure, when IP calls HTM_442, HTM_442 will give beep, only users input the password (1234) correctly can you get PSTN dial-tone and dial.

3.3.7. Abandon changes

If your new settings are not saved, you can clean all the unsaved new parameters.

4. Too

If you

htte://www.hybertone.come

6.2. Advanced Configuration

There are many configuration option in the advanced configuration, such as Agent Services, Speech Coding sequence and so on, if you familiar with our product, you can configure directly, if not, please vieec-06Tuj-0.05568 Tc 0Tc ( ) Tj0 Tc (n) Tj-0.22d(,) Tj0.18432 05568 Tc (i) T (c) confnd eee, plerSpviee